

Specification Submittal Data / Panasonic Air Purification Device

Description

Spot air purification device shall be low noise ceiling mount type, rated for continuous run. Certified by Intertek for UL/CSA safety standards.

nanoe™ X Technology:

- Device utilizes patented nanoe™ X charged water particle generation technology to purify contaminated air.
- Inhibits growth of bacteria, viruses, allergens, and mold; and breaks down hazardous substances.*

Motor/Blower:

- Air Volume shall be > 9 CFM.
- Two pole condensor AC motor.
- Power rating shall be 120 volts and 60 Hz.
- Motor equipped with thermal-cutoff fuse.

Housing:

• Polypropylene resin housing

Installation:

- Ideal for use in light commercial applications, educational facilities, long term care facilities, hotels, elevators, restaurants and other public spaces.**
- Great for use in residential settings including living rooms, bedrooms, basements, closets and mudrooms.
- Perfect way to spot purify your space during off hours when your HVAC system is not operating; or for use in tight spaces, like conference rooms.
- Mounts into virtually any ceiling and can be used with new or existing wiring.***
- Panasonic recommends installation be tied into a constant run circuit to ensure optimal performance.
- Built-in clips hold unit firmly onto sheetrock or ceiling tiles; no additional brackets needed.

Maintenance:


• Maintenance-Free device; no filters to change.

Warranty:

• All Parts: 3 Years from original purchase date.

Architectural Specifications:

Spot air purification device shall be ceiling mount, certified by Intertek for UL/CSA safety standards with no less than 9 CFM and < 0.3 sones. Purification device shall utilize Panasonic's patented nanoe™-X charged water particle generation technology to purify contaminated air. Power consumption shall be no greater than 4.0 Watts. The AC motor shall be two pole condenser type. Power rating shall be 120v/60Hz. Purification device shall comply with California Air Resources Board (CARB) for electrical safety and ozone requirements specified in Title 17, California Code of Regulations, subchapter 8.7 "Indoor Air Cleaning Devices."

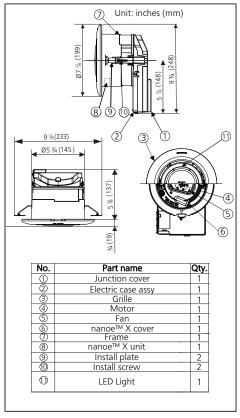

FV-01VCN1

Specifications	WhisperAir Repair™	
Specifications	FV-01VCN1	
Air Volume (CFM)	9	
Noise (sones)	<0.31	
Power Consumption (watts)	4.0	
Speed (RPM)	1510	
Current (amps)	0.04	
Power Rating (V/Hz)	120/60	
Net Weight [Lb (kg)]	3.1 (1.4)	

¹ Radiated Sound Testing conducted in an anechoic chamber, 3-microphone array with placement 3ft/1m above, below and to the side of the product.

Panasonic factory is registered as an EPA establishment that produces a pesticide device; factory EST ID: 93165-MEX-1.



^{*} WhisperAir Repair's impact on odors, allergens, pollens and hazardous substances was based on testing in an 812ft³/23m³ room. WhisperAir Repair's ability to inhibit growth of virus (tested with Bacteriophage ΦΧ174), mold (tested with Alternaria), was based on testing in an 883 ft³/25m³ area. Bacteria (gram-positive Staphylococcus epidermidis) testing was based on a 1728ft³/49m³ room. Please refer to the Panasonic website for more details: us.panasonic.com/ventfans.

^{**} Not FDA certified for use in medical facilities.

^{***}Refer to local jurisdictions and manufacturer installation guide.




Specification Submittal Data / Panasonic Air Purification Device

(Continued)

The nanoe™ X Advantage

Panasonic nanoe™ X is the next generation of our exclusive nanoe™ air purification technology for improved indoor air quality. nanoe™ X is generated from moisture in the air that contains highly reactive components known as hydroxyl (OH) radicals, which have been proven effective at suppressing airborne pollutants, bacteria and odors.

NanoeTM-X are Hydroxyl Radicals (OH) inculpated in water, giving them a longer life span (up to 10 min¹). Their size is 5-20nm² which allows them to penetrate fabrics thoroughly and reach every corner of the room in order to inhibit pollutants like viruses and allergens.

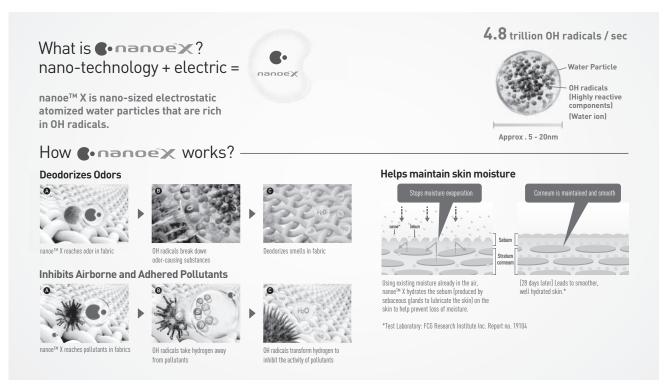

¹ https://www.panasonic.com/global/consumer/clean/hydroxyl/history.html

² 1nm (nanometer = 0.00000001m (one billionth of a meter)







Odors

INIIDI



Mold

Bacteria & viruses

INHIBITS 5 TYPES OF POLLUTANTS*



Allergens



Pollen

Hazardous

substances

MOISTURIZES



Skin & hair

For complete Installation Instructions visit us.panasonic.com/ventfans

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

Two Riverfront Plaza Newark, NJ 07102



