

WhisperSense® DC Ventilation Fan and Fan/Light

WhisperSense® DC VENTILATION FAN

FV-0511VQC1

FV-0511VQCL1



HEALTHY AIR, HEALTHY HOME

True Flow ratings at **0.375"** static pressure provide powerful airflow to assure code compliant, healthy homes.



- Precision spot ventilation fans ideal for use in the bathroom, laundry room, mud room, basement or garage
- Revolutionary ECM motor with SmartFlow™ technology for optimum CFM output
- Pick-A-Flow Airflow Selector (50-80-110 CFM) combined with SmartFlow™ Technology simplifies the selection process and ensures optimum performance to meet code and reduce callbacks
- Dual Sensor Technology (Motion & Moisture) provides built-in redundancy for the ultimate in automatic moisture and odor control
- Single-hinged Flex-Z Fast bracket provides flexible, fast & trouble-free installation, even from below the ceiling
- Lighted model incorporates one 10W dimmable LED chip panel with <1W LED night light for warm, long-life energy efficient illumination (night light must be wired separately)
- Elegant grille design compliments the aesthetics of any room
- Can be used to comply with LEED, ENERGY STAR® IAP, CALGreen, EarthCraft, CA Title 24 and WA state code

ADDITIONAL BENEFITS

- Integrated 4" or 6" dual duct adapter enhances installation options
- UL listed for tub/shower enclosure when GFCI protected
- Auto shut off feature helps eliminate unnecessary energy use and further reduces operating costs
- Built-in metal flange provides blocking for penetrations through drywall as an Air Barrier, and assists with the decrease in leakage in the Building Envelope during blower door testing
- Built-in damper reduces back drafting and helps with blower door testing
- Warranty: 6 years ECM Motor, 5 years LED, 3 years all other parts
- UL listed for use with the Panasonic Ceiling Radiation Damper (model # PC-RD05C5)

* Industry research indicates static pressure in typical installations ranges from 0.20" to 0.375".

The power of performance, with exclusive smart sensing technology



ECM Motor with SmartFlow™ Technology

WhisperSense® DC™ is designed to perform as rated. When the fan senses static pressure, its speed is automatically increased to ensure optimal CFM output. This feature provides peace of mind, as the installer doesn't have to worry about compromising the fan's performance, even with a complicated duct run.



Pick-A-Flow Airflow Technology

Built-in Pick-A-Flow airflow selector provides the unique ability to select your required airflow (50-80-110 CFM) with the simple flip of a switch.

Three ways the fan can function

- Motion on/Motion off
- Motion on/Humidity off
- Humidity on/Humidity off
- Variable humidity controls from 30-80% Relative Humidity (RH)
- Adjustable delay timer from 30 seconds to 60 minutes


Dual Sensor Technology



LED Lighting


WhisperSense® DC fan/light models feature a contemporary flush mount grille that incorporates one 10W Dimmable LED chip panel with <1W LED night light for warm, long-life energy efficient illumination. Panel specifications include: 3000 Kelvin Warm White/90CRI/700 lumens/70 LPW/ENERGY STAR 2.0 certified/JA-8 compliant for CA Title 24/50,000 hours rated average life.

FV-0511VQC1

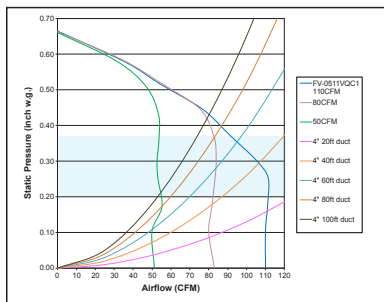

FV-0511VQC1


FV-0511VQCL1

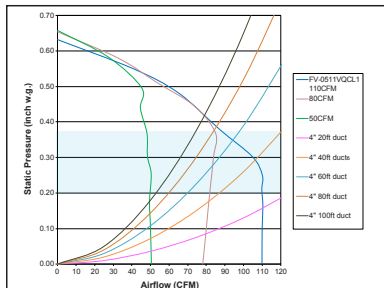


FV-0511VQCL1

*Industry research indicates static pressure in typical installations ranges from 0.20" to 0.375".

FV-0511VQC1



FV-0511VQCL1



*Industry research indicates static pressure in typical installations ranges from 0.20" to 0.375".
As tested by an EPA recognized lab

Specifications		WhisperSense DC															
		FV-0511VQC1								FV-0511VQCL1							
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1
	Air Volume (CFM)	110	111	91	80	83	82	50	53	53	110	110	86	80	83	82	50
	Noise (sones)	<0.3	0.9	-	<0.3	0.6	-	<0.3	0.4	-	0.4	0.9	-	<0.3	0.6	-	<0.3
	Power Consumption (watts)	10.6	16.4	17.1	5.9	10.8	14.5	4.0	7.2	10.5	10.9	16.1	16.8	6.0	11.0	14.6	3.9
	Energy Efficiency (CFM/watt)	10.6	6.9	5.3	13.6	7.7	5.7	12.5	7.4	5.1	10.3	7.0	5.1	13.7	7.7	5.6	14.1
	Speed (RPM)	957	1239	1382	821	1172	1351	756	1093	1195	1016	1268	1398	867	1185	1370	768
	Current (amps)	0.18	0.26	0.27	0.11	0.18	0.24	0.07	0.13	0.18	0.18	0.26	0.26	0.11	0.19	0.24	0.07
	MAX. Current (amps)	0.27		0.27		0.27		0.27		0.27		0.27		0.27		0.27	
	Power Rating (V/Hz)	120/60		120/60		120/60		120/60		120/60		120/60		120/60		120/60	
	Motor Type	ECM		ECM		ECM		ECM		ECM		ECM		ECM		ECM	
Specifications	Type of Motor Bearing	Ball		Ball		Ball		Ball		Ball		Ball		Ball		Ball	
	Thermal Fuse Protection	Yes		Yes		Yes		Yes		Yes		Yes		Yes		Yes	
	Blower Wheel Type	Sirocco		Sirocco		Sirocco		Sirocco		Sirocco		Sirocco		Sirocco		Sirocco	
	ENERGY STAR Qualified	Yes		Yes		Yes		Yes		Yes		Yes		Yes		Yes	
	Installation	4" or 6"		4" or 6"		4" or 6"		4" or 6"		4" or 6"		4" or 6"		4" or 6"		4" or 6"	
Light Specifications	Mounting Opening (inches sq.)	10-1/2		10-1/2		10-1/2		10-1/2		10-1/2		10-1/2		10-1/2		10-1/2	
	Grille Size (inches)	13		13		13		13		13		13		13		13	
	Lamp Watts	N/A		N/A		N/A		10.0		10.0		10.0		10.0		10.0	
	Lumens (lm)	N/A		N/A		N/A		700		700		700		700		700	
	Lumens Per Watt (LPW)	N/A		N/A		N/A		70		70		70		70		70	
	Color Rendering Index	N/A		N/A		N/A		90		90		90		90		90	
	Color Temperature (Kelvin)	N/A		N/A		N/A		3,000		3,000		3,000		3,000		3,000	
	Rated Life (hours)	N/A		N/A		N/A		50,000		50,000		50,000		50,000		50,000	
	Lamp Model #	N/A		N/A		N/A		N/A		N/A		N/A		N/A		N/A	
	Type of Lamp Socket	N/A		N/A		N/A		LED Chip		LED Chip		LED Chip		LED Chip		LED Chip	
Approved Code/ Standard/ Regulation	Night Light Specs	Night Light Watts		N/A		N/A		N/A		0.2		0.2		0.2		0.2	
	Shipping	Gross Weight (lbs)		11.2		11.2		11.2		11.9		11.9		11.9		11.9	
	UL tub/Shower Enclosure	Yes		Yes		Yes		Yes		Yes		Yes		Yes		Yes	
		Washington VIAQ Code		Yes		Yes		Yes		Yes		Yes		Yes		Yes	
		Wall installation		No		No		No		No		No		No		No	
Approved Code/ Standard/ Regulation	California Title 24 Compliant	Yes		Yes		Yes		Yes		Yes		Yes		Yes		Yes	
	Mfg in ISO 9001 Certified Facility	Yes		Yes		Yes		Yes		Yes		Yes		Yes		Yes	



CALGreen

Panasonic
IAQ Division
Two Riverfront Plaza
Newark, NJ 07102
na.panasonic.com/us/iaq

For Order Information
PHONE: 866-292-7299
FAX: 888-553-0723
ventfans@us.panasonic.com