



Recessed Inlet®

Recessed Inlet®

FV-NLF46RES



- Includes (1) replaceable, 8W ENERGY STAR 2.0 certified, GU24 base LED lamp, JA-8 compliant for CA Title 24 and Title 20
- Multi-purpose exhaust or supply recessed inlet is ideal for use with remote mount in-line fans and H/ERVs
- Can be used as a light only option matching the WhisperRecessed LED fan with a dimmable LED light
- Incorporates an architectural grade recessed can light design
- Beautiful lighting with 6" aperture and advanced luminaire design

ADDITIONAL BENEFITS



- Can be used to comply with ASHRAE 62.2, LEED, CALGreen*, JA8 compliant for CA Title 24 & Title 20
- Can be used in conjunction with SelectCycler System® to create a wired, measurable balanced ventilation solution
- Can be used as a re-circulation filtration device in the home
- Can be used to create slight positive pressure within the home instead of using a Central HVAC
- Excellent fresh air solution in combination with ductless HVAC solutions
- Designed for use in conjunction with furnace blower in Combustion Appliance Zone (CAZ) depressurization situations
- Easy installation in new construction or retrofits

The Design Solution for Exhaust or Supply Inlets

Recessed Inlet



FV-NLF46RES

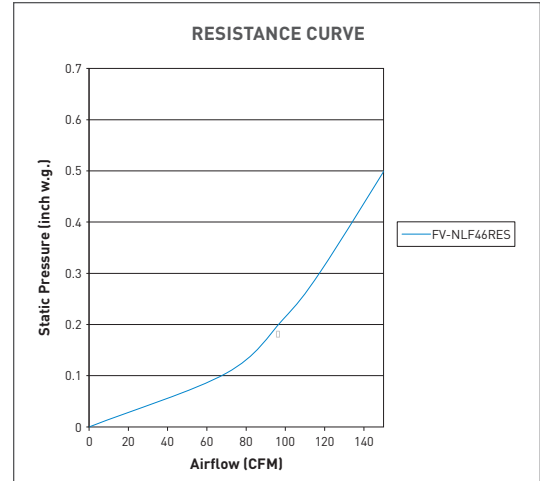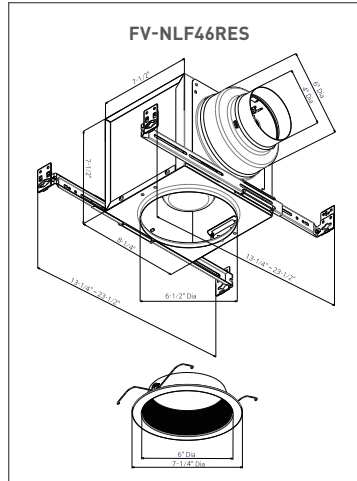

LED Lamp

(1) 8 Watt GU24 base LED lamp, /2700 Kelvin Warm White/>92CRI/720 lumens/90 LPW/ENERGY STAR 2.0 certified, JA-8 compliant for CA Title 24 and Title 20, 25,000 rated average life.

| | Recessed Inlet | FV-NLF46RES | |
|--|------------------------------------|------------------|-----|
| Characteristics (HVI tested data for 0.1" S.P.) | Static Pressure in inches w.g. | N/A | N/A |
| | Air Volume (CFM) | N/A | N/A |
| | Noise (sones) | N/A | N/A |
| | Power Consumption (watts) | N/A | N/A |
| | Energy Efficiency (CFM/Watt) | N/A | N/A |
| | Speed (RPM) | N/A | N/A |
| | Current (amps) | N/A | N/A |
| | MAX. Current (amps) | N/A | |
| | Power Rating (V/Hz) | 120/60 | |
| | Motor Type | N/A | |
| Specifications | Type of Motor Bearing | N/A | |
| | Thermal Fuse Protection | N/A | |
| | Blower Wheel Type | N/A | |
| | ENERGY STAR Qualified | Yes* | |
| | | | |
| Installation | Duct Diameter (Inches) | 4" or 6" | |
| | Housing Collar Opening (Inches) | 6-1/2" Round | |
| | Trim Outer Diameter (Inches) | 7-1/4" Round | |
| Light Specifications | Lamp Watts | 1 x 8w | |
| | Lumens (lm) | 750 | |
| | Lumens Per Watt (LPW) | 68 | |
| | Color Rendering Index | 92 | |
| | Color Temperature (Kelvin) | 2,700 | |
| | Rated Life (hours) | 25,000 | |
| | Lamp Model # (Green Creative) | 8BR30DIM927/GU24 | |
| | Type of Lamp Socket | GU24 | |
| Shipping | Gross Weight (lbs) | 6.9 | |
| Approved Code/Standard/Regulation | UL tub/Shower Enclosure | Yes | |
| | CALGreen | N/A | |
| | Washington VIAQ Code | N/A | |
| | California Title 24 Compliant | Yes | |
| | Mfg in ISO 9001 Certified Facility | Yes | |

*Only for the Lamp



Panasonic IAQ Division

Two Riverfront Plaza
Newark, NJ 07102

na.panasonic.com/us/iaq

For Order Information

PHONE: 866-292-7299

FAX: 888-553-0723

ventfans@us.panasonic.com

IAQ22108SS