


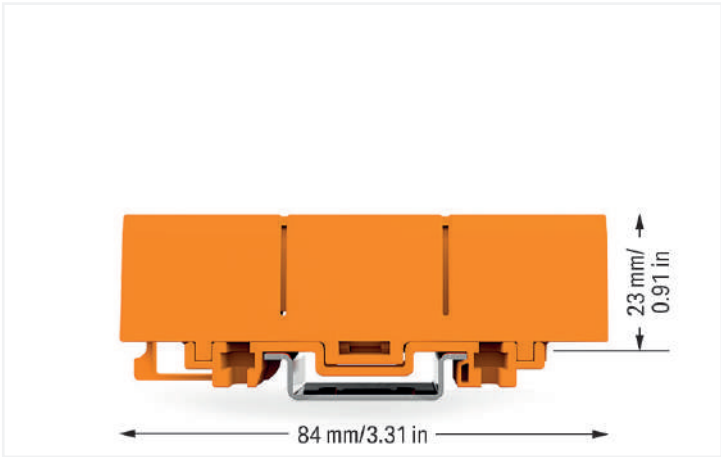

Color: ■ orange

Notes	
Note	One single carrier can hold up to 30 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks. Additional benefits: • Mount carrier onto DIN-35 rail or via screws – easily and quickly • Accommodate three 4 mm² (12 AWG) 2773 Series Connectors in a single carrier • Easily exchange connectors • Large marking area for self-adhesive marking strips or for direct marking with permanent felt-tip pen

Physical data	
Width	18 mm / 0.709 inches
Height	84 mm / 3.307 inches
Depth from upper-edge of DIN-rail	23 mm / 0.906 inches
Depth	28.9 mm / 1.138 inches

Mechanical data	
Mounting type	DIN-35 rail Screw mount
Suitable	for single- and double-row connectors (2773 Series)

Material data	
Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.389 MJ
Weight	12.6 g



Commercial data		
PU (SPU)		50 (10) pcs
Packaging type		Box
Country of origin		CN
GTIN		4055143837439
Customs tariff number		39269097900

Product classification		
UNSPSC		39121410

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2773-500	

CAD/CAE-Data

CAD data	
2D/3D Models 2773-500	

1 Compatible Products

1.1 Optional Accessories


1.1.1 Marking

1.1.1.1 Marking strip



[Item No.: 210-834](#)
Marking strips; on reel; 5 mm wide; plain;
Self-adhesive; white

Installation Notes



To adjust the mounting carrier, unlock the latch via operating tool (5.5 mm blade) and move the clamping slide to the required width by rotating the tool.

The mounting carrier is suitable for both connector widths.

