



## WhisperRecessed® LED Ventilation Fan/Light

**Energy efficient  
8 Watt lamp!**

**WhisperRecessed® LED**  
VENTILATION FAN

FV-08VRE2



- Includes (1) replaceable, 8W ENERGY STAR 2.0 certified, GU24 base LED lamp, JA-8 compliant for CA Title 24 and Title 20
- ENERGY STAR® rated architectural grade recessed fan with dimmable LED light
- Quiet, energy efficient and powerful 80 CFM ventilation hidden above the ceiling
- Ideal for use in the bathroom, living room or laundry room
- Beautiful lighting with 6" aperture and advanced luminaire design

### ADDITIONAL BENEFITS

- Can be used to comply with ASHRAE 62.2, LEED, CALGreen\*, JA8 compliant for CA Title 24 & Title 20
- Integrated 4" or 6" duct adapter
- UL listed for tub/shower enclosure when GFCI protected
- IC rated
- 5-year warranty on LED, 3-years on parts

\*Can be used to comply with CALGreen when controlled by the Panasonic Condensation Sensor Plus



# The Design Solution for Fan/LED Light Combinations


**WhisperRecessed® LED**  
VENTILATION FAN

**Energy efficient  
8 Watt lamp!**




**FV-08VRE2**

**FV-08VRE2**

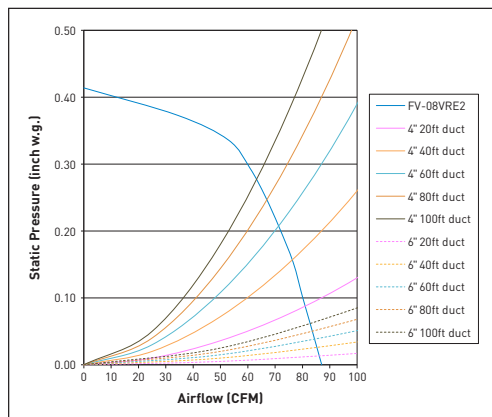

**FV-08VRE2**

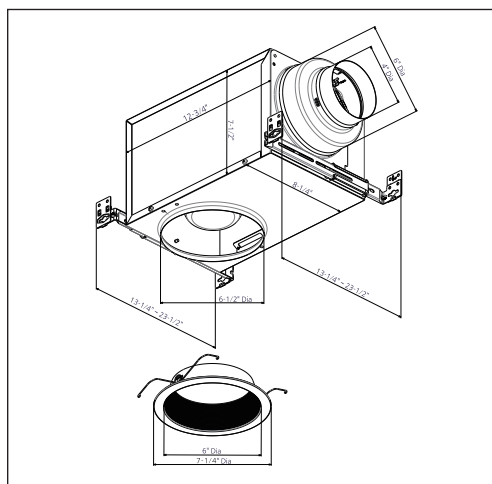

## **NEW! LED Lighting**

(1) 8 Watt GU24 base LED lamp, /2700 Kelvin Warm White/>92CRI/720 lumens/90 LPW/ ENERGY STAR 2.0 certified, JA-8 compliant for CA Title 24 and Title 20, 25,000 rated average life.

| Specifications                                     |                                          | WhisperRecessed LED |      |
|----------------------------------------------------|------------------------------------------|---------------------|------|
|                                                    |                                          | FV-08VRE2           |      |
| Characteristics<br>(HVI tested data for 0.1" S.P.) | Static Pressure in inches w.g.           | 0.1                 | 0.25 |
|                                                    | Air Volume (CFM)                         | 80                  | 66   |
|                                                    | Noise (sones)                            | 1.0                 | 0.8  |
|                                                    | Power Consumption (watts)                | 18.5                | 17.6 |
|                                                    | Energy Efficiency (CFM/watt)             | 4.4                 | 3.8  |
|                                                    | Speed (RPM)                              | 1342                | 1480 |
|                                                    | Current (amps)                           | 0.15                | 0.15 |
|                                                    | MAX. Current (amps)                      | 0.19                |      |
|                                                    | Power Rating (V/Hz)                      | 120/60              |      |
|                                                    | Motor Type                               | AC                  |      |
| Specifications                                     | Type of Motor Bearing                    | Ball                |      |
|                                                    | Thermal Fuse Protection                  | Yes                 |      |
|                                                    | Blower Wheel Type                        | Sirocco             |      |
|                                                    | ENERGY STAR Qualified                    | Yes                 |      |
|                                                    | Duct Diameter (inches)                   | 4" or 6"            |      |
| Installation                                       | Housing Collar Opening (Inches)          | 6-1/2" Round        |      |
|                                                    | Trim Outer Diameter (Inches)             | 7-1/4" Round        |      |
|                                                    |                                          |                     |      |
| Light Specifications                               | Lamp Watts                               | 1 x 8w              |      |
|                                                    | Lumens (lm)                              | 720                 |      |
|                                                    | Lumens Per Watt (LPW)                    | 90                  |      |
|                                                    | Color Rendering Index                    | 92                  |      |
|                                                    | Color Temperature (Kelvin)               | 2,700               |      |
|                                                    | Rated Life (hours)                       | 25,000              |      |
|                                                    | Lamp Model # [Green Creative]            | 8BR30DIM927/GU24    |      |
|                                                    | Type of Lamp Socket                      | GU24                |      |
|                                                    |                                          |                     |      |
| Shipping                                           | Gross Weight (lbs)                       | 10.4                |      |
|                                                    |                                          |                     |      |
| Approved Code/Standard/Regulation                  | UL tub/Shower Enclosure                  | Yes                 |      |
|                                                    | CALGreen                                 | Yes*                |      |
|                                                    | Washington VIAQ Code                     | Yes                 |      |
|                                                    | California Title 24 & Title 20 Compliant | Yes                 |      |
|                                                    | Mfg in ISO 9001 Certified Facility       | Yes                 |      |

\*Can be used to comply with CALGreen when controlled by the Panasonic Condensation Sensor Plus.  
As tested by an EPA recognized lab  
**Powerful Performance at 0.25"**



**Panasonic**  
**IAQ Division**  
Two Riverfront Plaza  
Newark, NJ 07102  
[na.panasonic.com/us/iaq](http://na.panasonic.com/us/iaq)

**For Order Information**  
PHONE: 866-292-7299  
FAX: 888-553-0723  
[ventfans@us.panasonic.com](mailto:ventfans@us.panasonic.com)